


Flat Bars

Available in spec and grades:
 JIS G3101 SS400, SS490
 EN 10025-2:2004 S235JR, S275JR, S355JR
 ASTM A36, A572 Gr 50

Dimensions and tolerances as per
 JIS G3191:2012
 EN 10058:2003
 ASTM A6/A6M

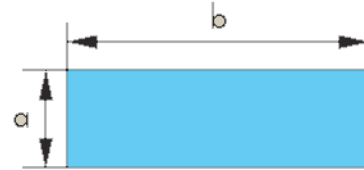

Width b (mm)	Thickness a (mm)													
	3	4	4.5	5	6	8	9	10	12	15	16	19	20	25
20	0.47	0.63	0.71	0.79	0.94	1.26	1.41	1.57	1.88					
25	0.59	0.79	0.88	0.98	1.18	1.57	1.77	1.96	2.36					
30	0.71	0.94	1.06	1.18	1.41	1.88	2.12	2.36	2.83					
32	0.75	1.0	1.13	1.26	1.51	2.01	2.26	2.51	3.01					
38	0.89	1.19	1.34	1.49	1.79	2.39	2.68	2.98	3.58	4.47	4.77	5.67	5.97	
40	0.94	1.26	1.41	1.57	1.88	2.51	2.83	3.14	3.77	4.71	5.02	5.97	6.28	
50	1.18	1.57	1.77	1.96	2.36	3.14	3.53	3.93	4.71	5.89	6.28	7.46	7.85	
60			2.12	2.36	2.83	3.77	4.24	4.71	5.65	7.07	7.54	8.95	9.42	
65			2.3	2.55	3.06	4.08	4.59	5.1	6.12	7.65	8.16	9.69	10.21	
70			2.47	2.75	3.3	4.4	4.95	5.5	6.59	8.24	8.79	10.44	10.99	
75			2.65	2.94	3.53	4.71	5.3	5.89	7.07	8.83	9.42	11.19	11.78	
80			2.83	3.14	3.77	5.02	5.65	6.28	7.54	9.42	10.05	11.93	12.56	
100			3.53	3.93	4.71	6.28	7.07	7.85	9.42	11.78	12.56	14.92	15.7	19.63
120				4.71	5.65	7.54	8.48	9.42	11.3	14.13	15.07	17.9	18.84	23.55
125				4.91	5.89	7.85	8.83	9.81	11.78	14.72	15.7	18.64	19.63	24.53
150				5.89	7.07	9.42	10.6	11.78	14.13	17.66	18.84	22.37	23.55	29.44
200				7.85	9.42	12.56	14.13	15.7	18.84	23.55	25.12	29.83	31.4	39.25
250					11.78	15.7	17.66	19.63	23.55	29.44	31.4	37.29	39.25	49.06
300					14.13	18.84	21.2	23.55	28.26	35.33	37.68	44.75	47.1	58.88